

APPLICATIONS : Near-line Database Expansion Storage • High Performance Direct Attached Storage for HPC or Application Server • Virtual Tape Library • Multimedia on Demand • Online E-mail Storage • Local Storage for Video Post-productions • Digital Content Source Database Storage • Private / Public Cloud Expansion




J4108-01



Features :


- Intelligent Enclosure Management
- Individual drive power management
- Hot swap design for easy maintenance and management
- Enclosure Cable Management Kit
- Tool-less drive trays

FRONT VIEW

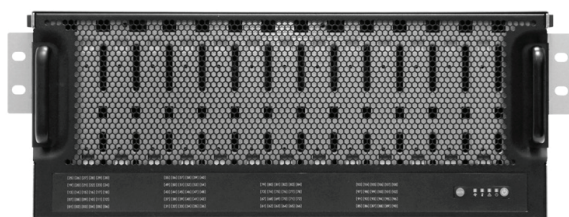

REAR VIEW

2000W 1+1 hot swap redundant 80+ Platinum

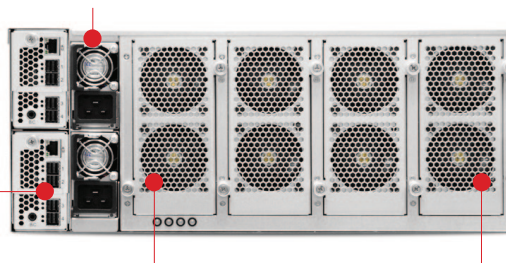

4 x Mini SAS HD

8 x 6056 hot-swap fans

SPECIFICATIONS

General	Number of Expander	Dual/Single
	Expander Chip	Broadcom SAS35X48
	Host/Expansion Interface	4 x Mini SAS HD (SFF-8644) per expander module
Drives Supported	Drive Interface	12Gb & 6Gb SAS if using dual expanders 12Gb & 6Gb SAS/SATA if using single expander
	Form Factor	3.5"
Administration / Management	Admin/Firmware Upgrade	In-band & Serial port Interface IEM port
	LED Indicators, Audible Alarm	Yes
Hot swap and Redundancy	Drive Bays	108
	Cooling	8 x 6056 hot-swap fans 1 x 4056 fan per expander module
	Power Supply	2000W 1+1 hot swap redundant 80+ Platinum
	Power Entry	Dual AC Inlet
	Expander Modules	Dual expanders (Optional)

Electrical and Environmental	Universal A/C Input	100~240V AC
	Operating Environment	Temperature : 0°C to 35°C Relative humidity : 20% to 80%
	Non-operating Environment	Temperature : -20°C to 60°C Relative humidity : 10% to 90%
Physical Specification	Dimensions (W x D x H)	mm : 434 x 1050 x 176 434 x 1273 x 176 (with CMA) inches : 17 x 41 x 7 17 x 50 x 7 (with CMA)
	Gross Weight (w/ PSU, w/o Rail & Disks)	kgs : 38.3 lbs : 84.4
	Packaging Dimensions (W x D x H)	mm : 616 x 1328 x 468 inches : 24.3 x 52.3 x 18.4
Mounting	Options	Tool-less slide rail Cable Management Kit